


5.5' SPA EXPERIENCE BATH WHIRLPOOL K-1457-AH

Features

- Acrylic
- Variable-speed pump with 1.5 kW heater, back-lit user keypad, and remote control
- 8 Flexjets™
- 8 effervescent ports
- 4 chromatherapy lights
- 240 V, 20 A electrical service
- UL listed
- Color-matched jet trim included
- Coordinating Portrait® Suite
- 67" (170.2 cm) x 42" (106.7 cm) x 22" (55.9 cm)

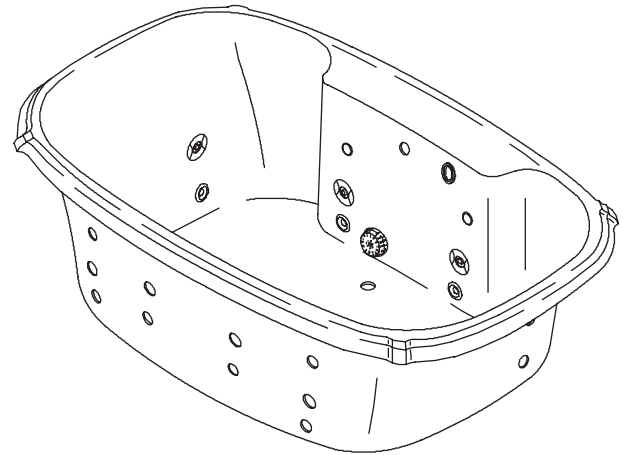

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- ASME A112.19.7M
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1457-AH	5.5' Spa Experience bath whirlpool	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories				
K-7161-AF	Adjustable pop-up drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-15880-K	Coralais base faucet (requires handle kit) OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-15881-K	Coralais base faucet (requires handle kit) OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-16122	Revival faucet	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

Optional Accessories			
K-1491	Pillow	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-1601	Footstop	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Product Specification

The acrylic bath whirlpool shall be 67" (170.2 cm) in length, 42" (106.7 cm) in width, and 22" (55.9 cm) in height. Product shall have 8 Flexjets, 8 effervescent ports, and 4 chromatherapy lights. Product shall feature a variable speed pump, 1.5 kW heater, back-lit user keypad, and remote control. Product shall have a 240 V, 20 A electrical service. Product shall be UL listed. Product shall include color-matched jet trim. Product shall coordinate with Portrait Suite. Bath whirlpool shall be Kohler Model K-1457-AH-_____.

PORTRAIT®

Technical Information

Fixture*:	
Bathing well:	
Basin area, bottom	50" (127 cm) x 29" (73.7 cm)
Basin area, top	61" (154.9 cm) x 32" (81.3 cm)
Weight	140 lbs (64 kg)
To overflow:	
Water depth	16" (40.6 cm)
Capacity	100 gal (378.5 L)
* Approximate measurements for comparison only.	

Included component:	
Cut-out template	113311-7

Pump	Heater	V	Hz	A
	1.5 kW	240	50/60	11

Minimum access panel (required):	
Pump/control	34" (86.4 cm) W x 15" (38.1 cm) H

Required Electrical Service

Dedicated circuit required, protected with Class A Ground-Fault Circuit-Interrupter (GFCI) or Residual Current Device (RCD):	
Pump/control	220-240 V, 20 A, 50/60 Hz

Installation Notes


Install this product according to the installation guide.

Floor support under whirlpool must provide for a minimum of 47 lbs/square foot (230 kg/square meter) loading.

Hot water supply should be 70% of capacity or greater. Installations will vary.

If installing a rim-mount faucet, make sure there is no interference with drain overflow and circulating system before drilling any holes. Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck.

No change in measurements if connected with drain illustrated. (K-7161-AF or K-7161M-AF)

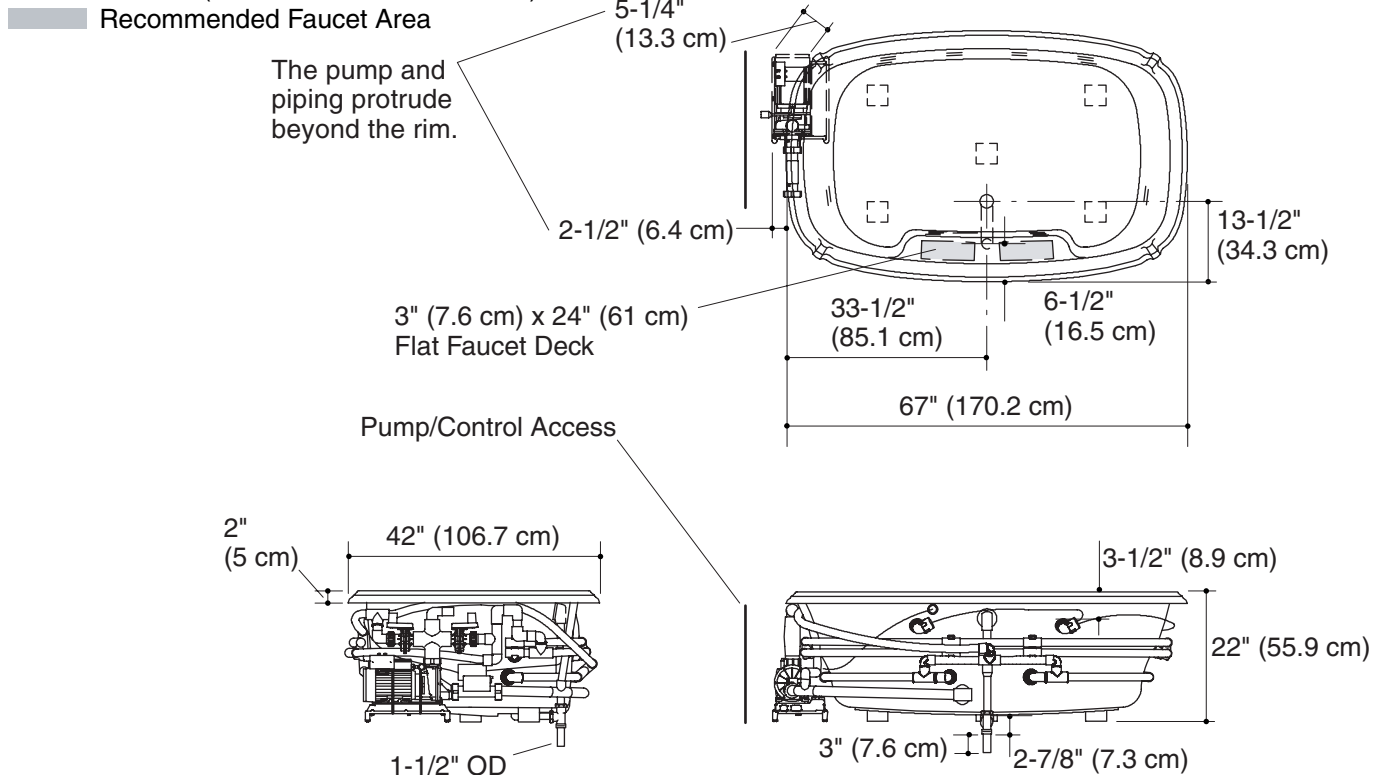

Product Diagram